


# Yardscrapers

## Flexi All Rubber Scraper




- With a simple pull cord latch mechanism, scrapers can be pulled or push as needed.
- Fully adjustable wings to give 3 variable working widths from 1.7m (6ft) – 2.47m (8ft)
- Scraping beam is heavy duty structural channel and reinforced fabricated plate.
- Specially designed 50mm thick x 400mm high flexible moulded rubber for long life and efficient scraping
- Heavy duty structural 3 PL box frame with computer aided design for increased drag efficiency giving better ground pressure for a cleaner sweep
- Optional linkage settings to suit most tractors up to 95hp with Category 1 and 2 lift pin options
- Speedy clean sweep
- Quick Hitch A frame is available as an optional extra
- Supplied with Cat 2 pins

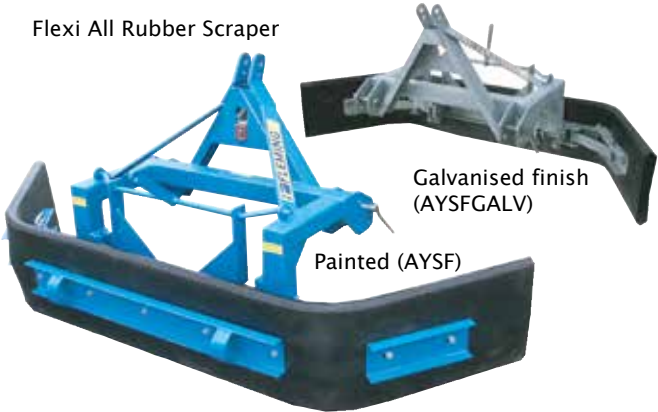

Model	Operating Width	Blade Height	Weight	Rubber Blade Thickness
Flexi All Rubber	1.7m – 2.47m	400mm	176kgs	50mm

# Yardscrappers

## Heavy Duty All Rubber Scraper

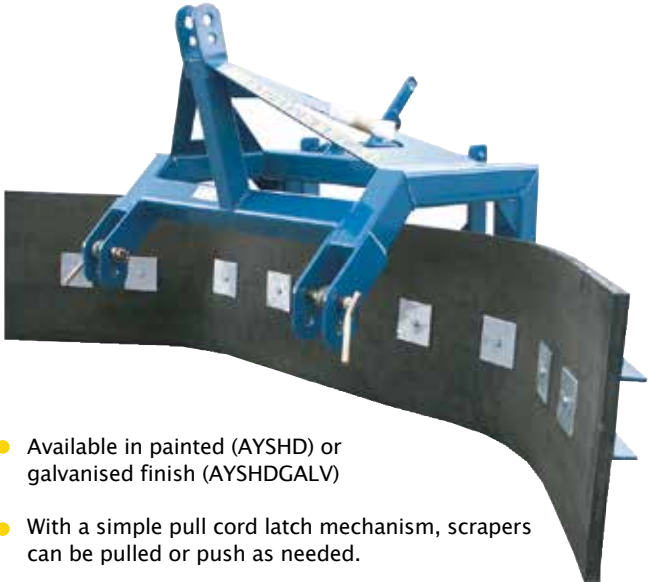

- Available in painted (AYSHD) or galvanised finish (AYSHDGALV)
- With a simple pull cord latch mechanism, scrapers can be pulled or push as needed.
- A set working width of 2.1m
- 25mm thick x 500mm rubber high flexible fibre reinforced hard wearing rubber
- Heavy duty structural box 3 PL frame with computer aided design for increased drag efficiency giving better ground pressure for a cleaner sweep
- Optional linkage settings to suit most tractors up to 95hp with Category 1 and 2 lift pin options
- Speedy clean sweep
- Supplied with Cat 2 pins



Model	Operating Width	Blade Height	Weight	Rubber Blade Thickness
Heavy Duty All Rubber	2.1m	500mm	150kgs	25mm

# Yardscrappers

## Standard All Rubber Scraper



- Available in painted (AYS) or galvanised finish (AYSGALV)
- With a simple pull cord latch mechanism, scrapers can be pulled or push as needed.
- A set working width of 2.1m
- 25mm thick x 375mm rubber high flexible fibre reinforced hard wearing rubber
- Structural 3 PL box frame with computer aided design for increased drag efficiency giving better ground pressure for a cleaner sweep
- Optional linkage settings to suit most tractors up to 75hp with Category 1 and 2 lift pin options
- Speedy clean sweep
- Supplied with Cat 1 pins

Model	Operating Width	Blade Height	Weight	Rubber Blade Thickness
Standard All rubber	2.1m	400mm	126kgs	25mm